


Specifications

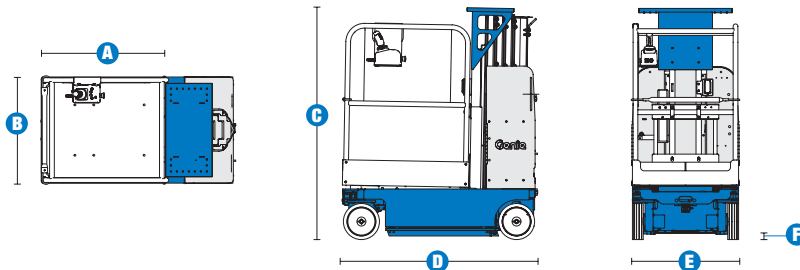

MODELS		GR™-20	
MEASUREMENTS		US	Metric
Working height*		25 ft 11 in	8.07 m
Platform height		19 ft 11 in	6.07 m
A B Platform dimensions (length x width)			
Standard		35 x 29.5 in	.89 x .75 m
Standard with extension		55 x 29.5 in	1.4 x .75 m
Stock picker		35 x 28.75 in	.89 x .73 m
Stock picker w/adjustable tray		56 x 28.75 in	1.4 x .73 m
Standard AWP****		27 x 26 in	.69 x .66 m
Narrow AWP****		26 x 20 in	.66 x .51 m
C Height - stowed		6 ft 6 in	1.98 m
D Length - stowed		4 ft 5 in	1.35 m
E Width		2 ft 7.5 in	.80 m
F Ground clearance - center		2.5 in	.06 m
PRODUCTIVITY			
Lift capacity		350 lbs	159 kg
Lift capacity - extension deck		250 lbs	113 kg
Drive speed - stowed		2.5 mph	4.0 km/h
Drive speed - raised		0.5 mph	0.8 km/h
Gradeability**		30%	
Turning radius - inside		zero	
- outside		4 ft 7 in	1.42 m
Raise / lower speed		24 / 21 sec	24 / 21 sec
Controls		24V DC proportional	
Tires - solid non-marking		10 x 3 x 8 in	25 x 8 x 20 cm
POWER			
Power source		24V (four 6V 225 Ah batteries)	
Hydraulic system capacity		2.2 gal	8.33 L
WEIGHT***			
		2,451 lbs	1,112 kg